



G35 Series

Maximum Flow Rate: 36.5 gpm (138 l/min)

Maximum Pressure: 1500 psi (103 bar) for Metallic Pump Heads

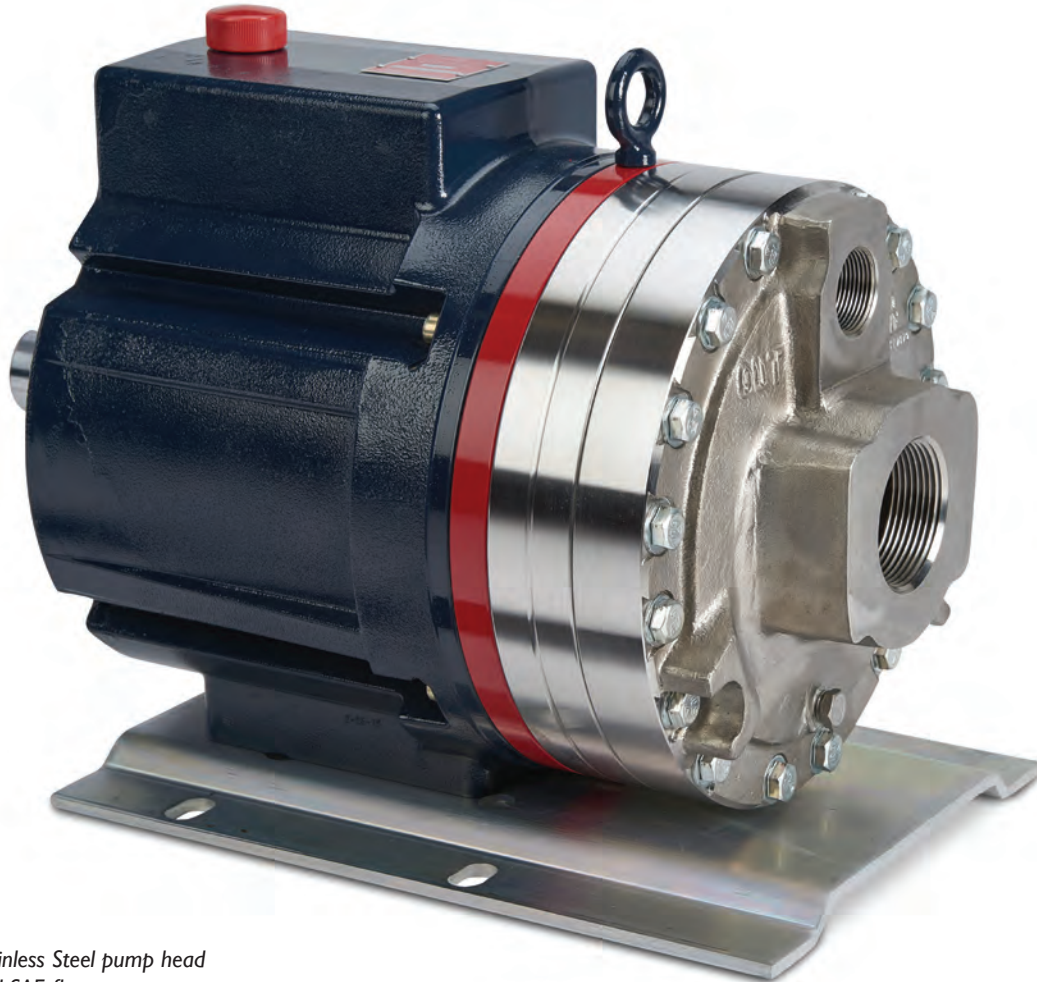

*G35 with Stainless Steel pump head
and SAE flanges*

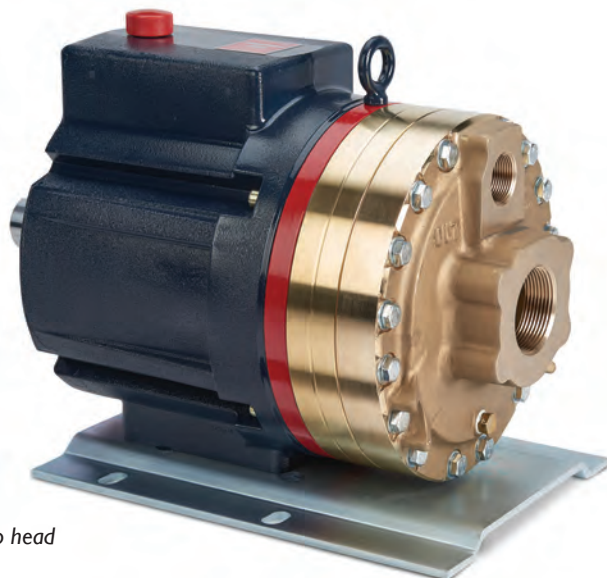

G35 with Brass pump head

G35 Series Performance

Capacities

Flow

| Model | Max. Input rpm | Max. Flow | |
|-----------------------------|----------------|-------------------------|-------|
| | | @ 1200 psi (83 bar) gpm | l/min |
| G35-X | 1050 | 36.5 | 138 |
| G35-E | 1150 | 34.0 | 129 |
| @ 1500 psi (103 bar) | | | |
| G35-X | 700 | 23.1 | 87.5 |

Pressure

Maximum Inlet Pressure


250 psi (17 bar) with 1500 psi (103 bar) maximum discharge pressure
 500 psi (34 bar) with 1200 psi (83 bar) maximum discharge pressure

Maximum Discharge Pressure

1200 psi (83 bar) @ 1150 rpm max.
 1500 psi (103 bar) @ 700 rpm max.

Performance and specification ratings apply to G35 configurations unless specifically noted otherwise.

Maximum Flow at Designated Pressure

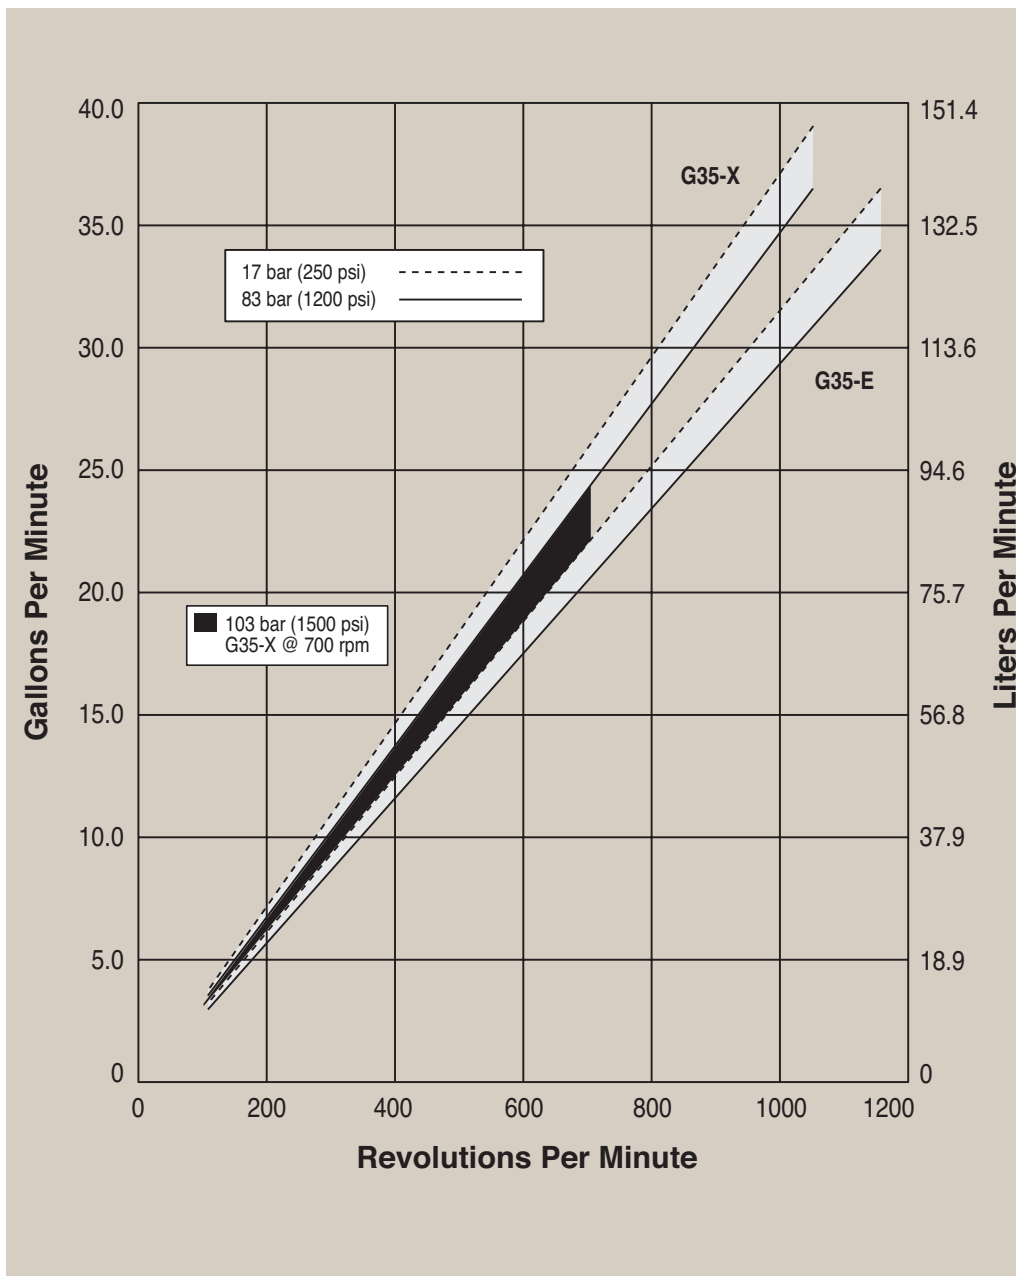

G35 Series Specifications

Flow Capacities @ 83 bar (1200 psi) 6-pole Motor @ 50 Hz

| Model | rpm | gpm | l/min |
|-------|-----|-------|--------|
| G35-X | 960 | 33.50 | 127.00 |
| G35-E | 960 | 29.00 | 110.00 |

Flow Capacities @ 83 bar (1200 psi) 8-pole Motor @ 50 Hz

| Model | rpm | gpm | l/min |
|-------|-----|-------|-------|
| G35-X | 730 | 25.50 | 96.60 |
| G35-E | 730 | 22.10 | 83.60 |

Delivery @ 83 bar (1200 psi)

| Model | gal/rev | liters/rev |
|-------|---------|------------|
| G35-X | 0.0347 | 0.1314 |
| G35-E | 0.0296 | 0.1120 |

Delivery @ 103 bar 1500 psi)

| Model | gal/rev | liters/rev |
|-------|---------|------------|
| G35-X | 0.0330 | 0.1250 |

Maximum Discharge Pressure

Metallic Heads: 103 bar (1500 psi) @ 700 rpm

Maximum Inlet Pressure 17 bar (250 psi) with 103 bar (1500 psi) maximum discharge pressure
34 bar (500 psi) with 83 bar (1200 psi) maximum discharge pressure

Maximum Operating Temperature

Metallic Heads: 121 °C (250 °F) - Consult factory for correct component selection for temperatures from 71 °C (160 °F) to 121 °C (250 °F).

Maximum Solids Size 800 microns

Inlet Port 2-1/2 inch BSPT
2-1/2 inch NPT
150lb or 600lb ANSI RF flange
3 inch SAE flange

Discharge Port 1-1/4 inch BSPT
1-1/4 inch NPT
600lb or 1500lb ANSI RF flange
1-1/4 inch SAE flange

Shaft Diameter 50.8 mm (2 inch)

Shaft Rotation Reverse (bi-directional)

Bearings Tapered roller bearings

Oil Capacity 7.3 liters (7.75 US quarts) - See pages 96 and 97 for oil selection and specification.

Weight

Metallic Heads: 116.6 kg (257 lbs.)

Calculating Required Power


$$\frac{100 \times \text{rpm}}{63,000} + \frac{\text{gpm} \times \text{psi}}{1,460} = \text{electric motor hp}$$

$$\frac{100 \times \text{rpm}}{84,428} + \frac{\text{l/min} \times \text{bar}}{511} = \text{electric motor kW}$$

See page 164 for calculating pulley size.

When using a variable frequency drive (VFD) calculate the hp or kW at minimum and maximum pump speed to ensure the correct hp or kW motor is selected. Note that motor manufacturers typically de-rate the service factor to 1.0 when operating with a VFD.

Net Positive Suction Head (NPSHr)

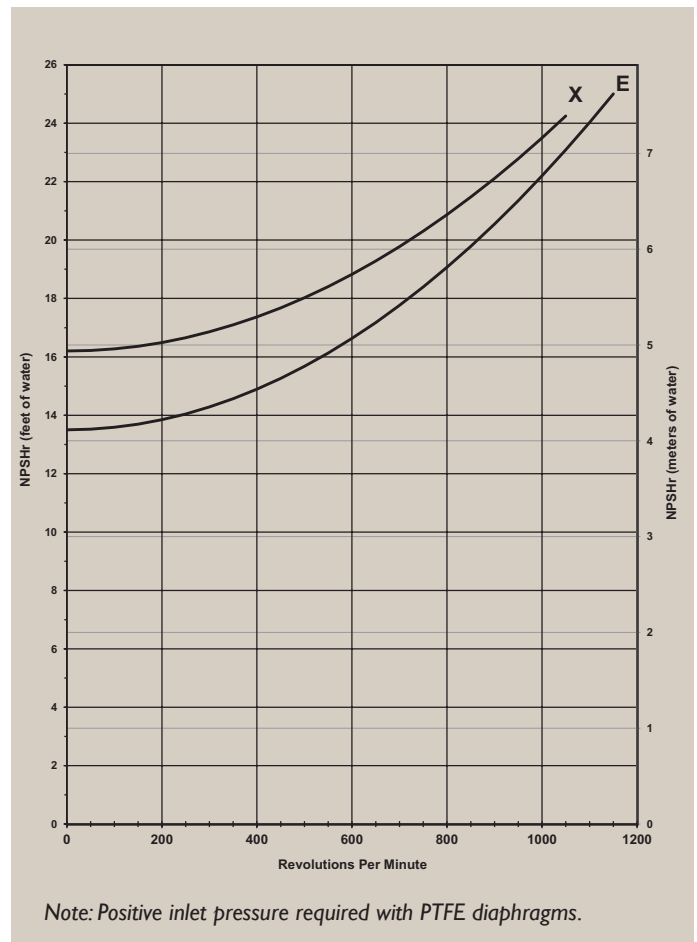



Self-priming:

Each Hydra-Cell pump has different lift capability depending on model size, cam angle, speed, and fluid characteristics. To ensure that your specific lift characteristics are met, refer to the inlet calculations regarding friction, and acceleration head losses in your Hydra-Cell Installation & Service Manual. Compare those calculations to the NPSHr curves above.



For technical assistance in pump selection, see Frequently Asked Questions on page 162, Design Considerations on page 163, and Installation Guidelines on pages 164-165.

G35 Series Representative Drawings

G35 Models with BSPT Inlet/Outlet Ports mm (Inches)

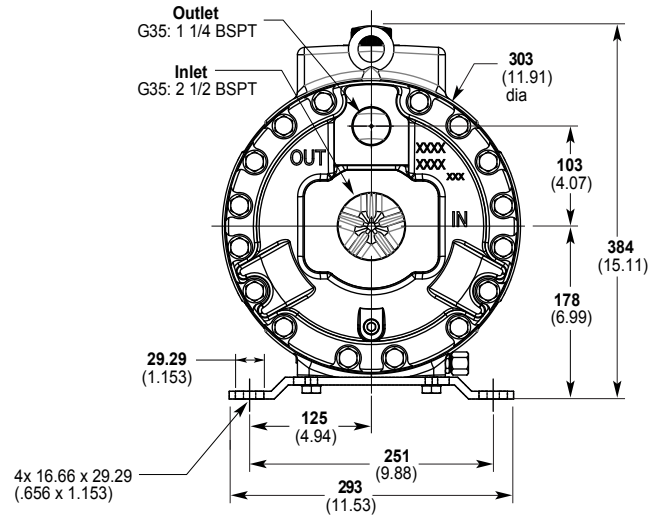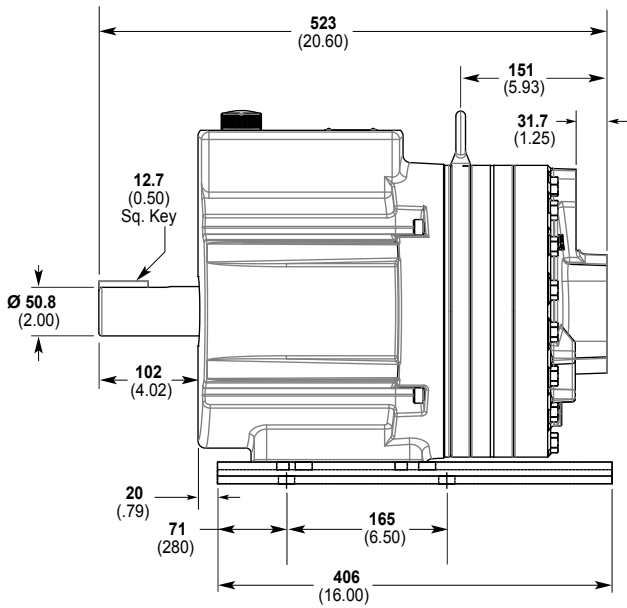


G35 Models with SAE Flange Inlet/Outlet Ports mm (Inches)

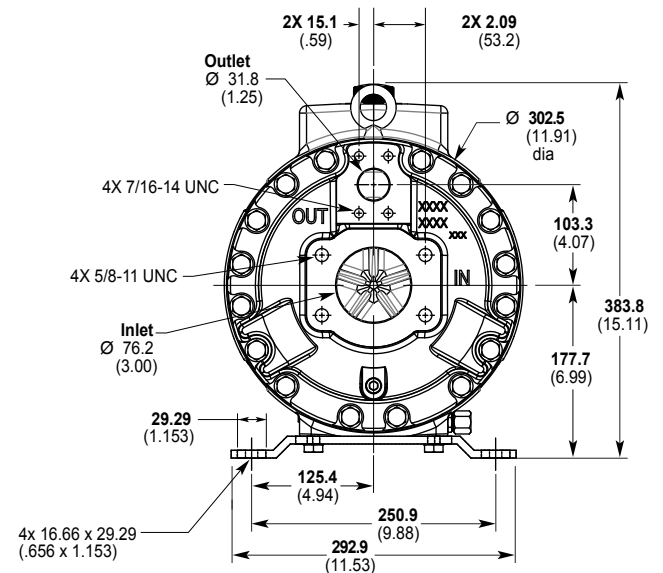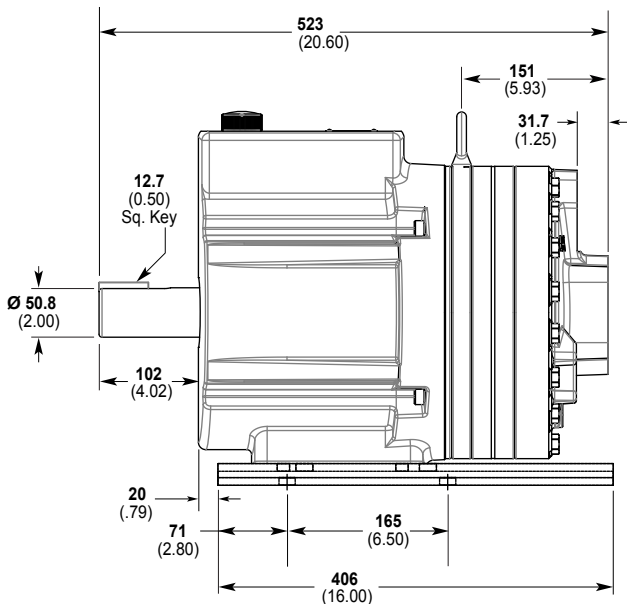

Note: Contact factory for additional drawings of specific models and configurations.

G35 Series Representative Drawings/Valves/Skids

G35 Models with ANSI Flange Inlet/Outlet Ports mm (Inches)

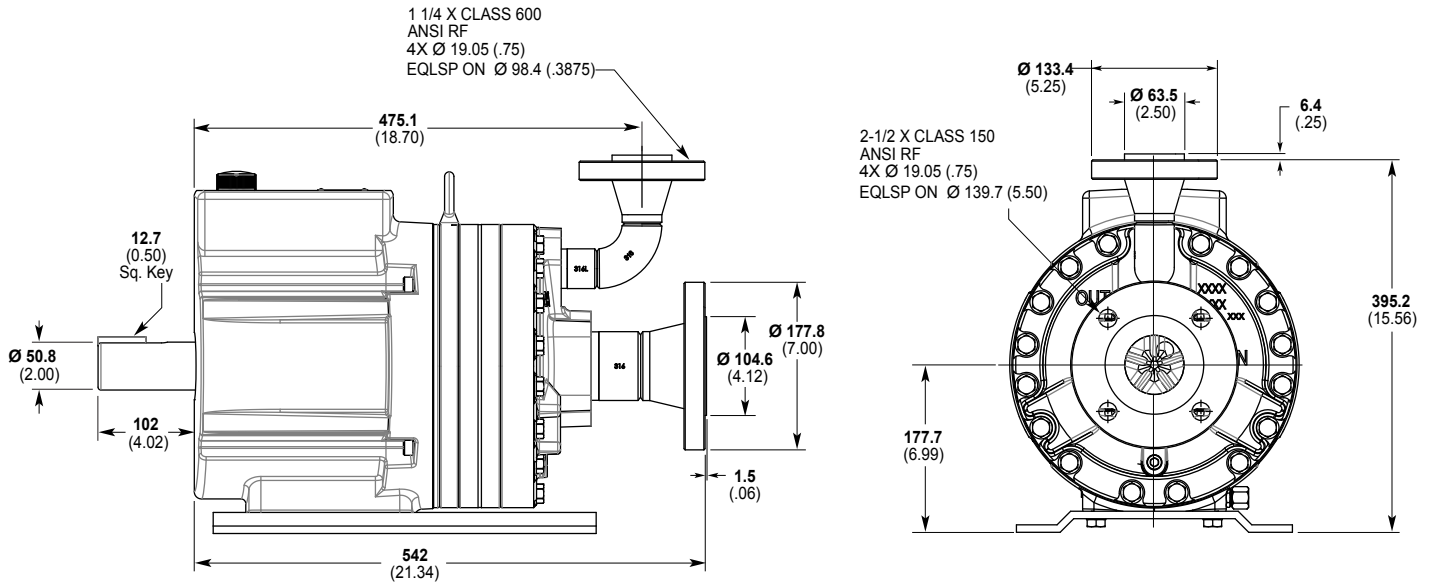

Valve Selection

A seal-less C64 Pressure Regulating Valve is recommended for Hydra-Cell G35 pumping systems, especially for high-pressure requirements or when handling dirty fluids. See page 88 for more information.



A C24 Pressure Regulating Valve provides a capable, lower-cost alternative to C64 valves for Hydra-Cell G35 pumping systems. See page 84 for more information.



Skid-mounted G35 with 20hp, 3-phase motor.



G35 Series How to Order

Ordering Information

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|---|---|---|---|---|---|---|---|----|----|----|

A complete G35 Series Model Number contains 12 digits including 9 customer-specified design and materials options, for example: G35XKBTHFECA.

| Digit | Order Code | Description |
|------------|------------|--|
| 1-3 | G35 | Pump Configuration Shaft-driven (BSPT Ports or SAE or ANSI Flanges) |
| 4 | X | Hydraulic End Cam Max 127.0 l/min (33.5 gpm) @ 960 rpm |
| | E | Max 110.0 l/min (29.1 gpm) @ 960 rpm |
| 5 | K | Pump Head Version Kel-Cell BSPT Ports or ANSI Flanges |
| | E | Kel-Cell SAE Flanges |
| | X | ATEX <i>(Note: ATEX 94/9/EC Certified, Category 2, Zone 1. Includes certificate and oil level monitor.)</i> |
| 6 | B | Pump Head Material Brass |
| | C | Cast Iron (Nickel-plated) |
| | G | Duplex Alloy 2205 (with Hastelloy C followers & follower screws) |
| | Q | 316L Stainless Steel ANSI flange class 600 x 1500 |
| | R | 316L Stainless Steel ANSI flange class 150 x 600 |
| | S | 316L Stainless Steel - threaded or SAE ports |
| | T | Hastelloy CW12MW |
| 7 | A | Diaphragm & O-ring Material Atlas diaphragm / PTFE o-ring |
| | E | EPDM (requires EPDM-compatible oil - Digit 12 oil code D) |
| | G | FKM |
| | J | PTFE (available with E cam only; 1050 rpm max.) |
| | P | Neoprene |
| | T | Buna-N |
| 8 | C | Valve Seat Material Ceramic |
| | D | Tungsten Carbide |
| | H | 17-4 Stainless Steel |
| | N | Nitronic 50 |
| | T | Hastelloy C |
| 9 | C | Valve Material Ceramic |
| | D | Tungsten Carbide |
| | F | 17-4 Stainless Steel |
| | N | Nitronic 50 |
| | T | Hastelloy C |

| Digit | Order Code | Description |
|-----------|------------|--|
| 10 | E | Valve Springs Elgiloy |
| | H | 17-7 Stainless Steel |
| | T | Hastelloy C |
| 11 | C | Valve Spring Retainers Celcon |
| | H | 17-7 Stainless Steel |
| | M | PVDF |
| | P | Polypropylene |
| | T | Hastelloy C |
| | Y | Nylon (Zytel) |
| 12 | A | Hydra-Oil 10W30 standard-duty oil |
| | B | 40-wt for continuous-duty oil (use with 316L SST or Hastelloy CW12MW pump head - standard) |
| | D | EPDM-compatible oil |
| | F | Food-contact oil |
| | G | 5W30 cold-temp severe-duty synthetic oil |
| | H | 15W50 high-temp severe-duty synthetic oil |

G35 Pump Housing is standard as Cast Aluminum. Upgrade to Ductile Iron available.

Note: For motors, bases, couplings and other pump accessories, refer to the Accessories section beginning on page 92.

Hydra-Cell®

Seal-less Pumps

Wanner Engineering, Inc.

World Headquarters & Manufacturing

Wanner Engineering, Inc.
1204 Chestnut Avenue,
Minneapolis, MN 55403 USA
Phone: 612-332-5681 • Fax: 612-332-6937
Toll-Free Fax (USA): 800-332-6812
Email: sales@wannereng.com
www.Hydra-Cell.com

Regional Office

207 US Highway 281
Wichita Falls, TX 76310 USA
Phone: 940-322-7111
Toll-Free: 800-234-1384
Email: sales@wannereng.com
www.Hydra-Cell.com

Latin American Office

R. Álvaro Anes, 150 Bairro Campestre
Santo André/São Paulo, Brazil - CEP 09070-030
Phone: +55 (11) 4081-7098
Email: mmagoni@wannereng.com
www.Hydra-Cell.com

Wanner International Ltd.

Wanner International, Ltd.
Hampshire - United Kingdom
Phone: +44 (0) 1252 816847
Email: sales@wannerint.com
www.Hydra-Cell.eu

Wanner Pumps Ltd.

Wanner Pumps, Ltd.
Kowloon - Hong Kong
Phone: +852 3428 6534
Email: sales@wannerpumps.com
www.WannerPumps.com

Shanghai - China
Phone: +86-21-6876 3700
Email: sales@wannerpumps.com
www.WannerPumps.com

